

# GE Sensing

## Features

- Low-cost
- Reliable (15 years of low-cost infrared sensor manufacturing)
- Pre-calibrated
- Maintenance free (calibration maintained with patented ABC Logic)
- Flexible configurations (see matrix, page 2)
- Intuitive VLI display
- Three available outputs: analog 0 to 10V, passive temperature (20K thermistor), and digital UIP interface (RS-232 TTL level)
- User-definable thresholds (optional UIP cable and software not included)
- RoHS and WEEE compliant

GE Sensing offers high-volume manufacturing capabilities for its Telaire products, a global sales force, and additional engineering resources to support your sensing application needs.

### Telaire® Technology

The technology is based on the absorption of light in a gold-plated, reflective light pipe or waveguide diffusion gas chamber. A gas permeable polytetrafluoroethylene (PTFE) filter prevents particulate and water contamination of the sensor. Light is absorbed in proportion to the CO<sub>2</sub> concentration and the remaining light is measured and converted into an analog signal.

### ABC Logic™ (Automatic Background Calibration)

The Telaire product line offers patented ABC Logic software for self-correction of drift to better than ±20 ppm per year. The system is virtually free of maintenance and typically has a lifetime of more than 10 years.

---

## T5000 Series

### Telaire® Airestat™ CO<sub>2</sub>/Temperature Transmitter

T5000 Series is a Telaire product. Telaire has joined other GE high-technology sensing businesses under a new name—GE Industrial, Sensing.



# GE Sensing

## The Product


The Telaire T5000 Series Airestat CO<sub>2</sub> and temperature transmitter is a low-cost wall-mounted sensing solution for demand-controlled ventilation. The Airestat provides an intuitive VLI (Visual Limit Indicator) display for CO<sub>2</sub> thresholds, a passive temperature output (20kΩ thermistor), and a standard analog 0 to 10 volt signal to maintain air quality in enclosed spaces (such as school classrooms, offices, gymnasiums and theaters.) The T5000 series also offers a digital UIP (User Interface Program) to configure internal CO<sub>2</sub> concentration thresholds (optional accessory cable and software not included.) The factory defaults are 1000 ppm and 1500 ppm.

## Product Features:

Telaire Model No.	CO2	Temp	LED	GE Logo
T5001	✓	✓		
T5003	✓	✓		✓
T5005	✓	✓	✓	
T5007	✓	✓	✓	✓

## VLI (Visual Limit Indicator)

GE Sensing—Telaire Products introduces an exciting new alternative to traditional scientific LCD display of the CO<sub>2</sub> value. Our new T5000 Series transmitter with VLI (Visual Level Indicator) communicates intuitively to the average end-user. The correlation between a CO<sub>2</sub> PPM reading and adequate ventilation may not be fully understood. Instead of offering the user a reading in ppm (parts per million), we provide a simple LED that communicates increased CO<sub>2</sub> concentrations based on definable or predetermined thresholds. The LED smoothly transitions between green, yellow and red as the CO<sub>2</sub> threshold is exceeded. Unlike scientific displays, training to understand ppm values is not a prerequisite with this innovative product.

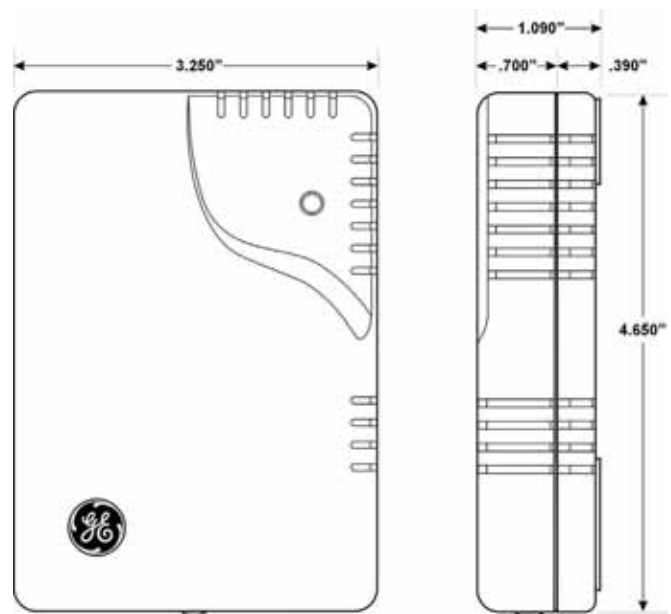

# T5000 Series Specifications

## Product

### Sampling Method

Non-dispersive infrared (NDIR), gold plated optics, (with Telaire's patented ABC Logic self calibration algorithm). Diffusion sampling.

### Measurement Range

0 to 2,000 ppm factory calibrated. Output scalable using UIP up to 3,000 ppm with resulting decrease in sensor accuracy

### Accuracy

± 75 ppm @ 72°F (22°C) when compared with a factory reference or 10% of reading, whichever is greater\*

### Temperature Dependence

0.2% FS per °F (°C)

### Stability

<2% of FS over life of sensor (15 years typical)

### Non-Linearity

<1% of FS

### Pressure Dependence

0.13% of reading per mm Hg

### Calibration Interval

Not required\*

### Response Time

3 to 5 minutes for 90% step change.

### Warm up Time

- <2 minutes (operational)
- 10 minutes (maximum accuracy)

### Operating Conditions

- 32°F to 122°F (0°C to 50°C)
- 0 to 95% RH, non condensing

### Storage Conditions

- -4°F to 158°F (-20°C to 70°C)
- 0 to 95% RH, non condensing

### Temperature

NTC 20k thermistor

### Output

- Analog: 0 to 10V (100 Ω output impedance)
- Digital: RS-232 (TTL Level) communication with Telaire UIP software

### Connections

Screw terminals for 18 to 28 AWG

### Power Supply Requirements

18 to 30 VAC RMS, 50/60Hz or 18 to 42 VDC, polarity protected

### Power Consumption

1.75 VA average, 2.75 VA peak

### Agency/Certifications

FCC Part 15 Class B, CE, RoHS, WEEE

### Warranty Term

18 months

\* Note: Automatic Background Calibration, or ABC Logic, is a patented self-calibration technique designed to be utilized in applications where concentrations will drop to outside ambient conditions (approximately 400 ppm) at least four times in a 14-day period, typically during unoccupied periods.

Full accuracy is achieved after two weeks of operation.

GE  
Sensing



©2007 GE. All rights reserved.  
920-420A

All specifications are subject to change for product improvement without notice.  
GE® is a registered trademark of General Electric Co. Other company or product  
names mentioned in this document may be trademarks or registered trademarks  
of their respective companies, which are not affiliated with GE.

[www.gesensing.com](http://www.gesensing.com)