

SWS-457

- ▣ indicator in wall-mounted case
- ▣ power supply output: 24V DC
- ▣ RS-485 / Modbus RTU
- ▣ MASTER / SLAVE
- ▣ multicoloured LED display


The **SWS-457** indicator is intended to show any numerical values quoted by the RS-485 link. Users have the possibility of an 9-step adjustment of colour (among others red, yellow and green) as well as a 8-step brightness adjustment for the display. The device features a 4-button keyboard for programming basic settings, which for greater security is located under the front cover. In order to make setting changes without unsealing the casing, remote control has been included by means of an infrared remote control unit (accessory). The keyboard on this remote control unit is the same as the device's keyboard (this applies to the type IP 67 casing).

- password protected,
- 9-step adjustment of colours for the display,
- display brightness adjustable in 8 steps,
- transmission speed adjustable: 1200 ÷ 115200 bit/sek.
- available with AC and DC power supply versions,
- two types of case: IP 65 and IP 67.




Typical applications

1. Retransmission of a measuring signal.

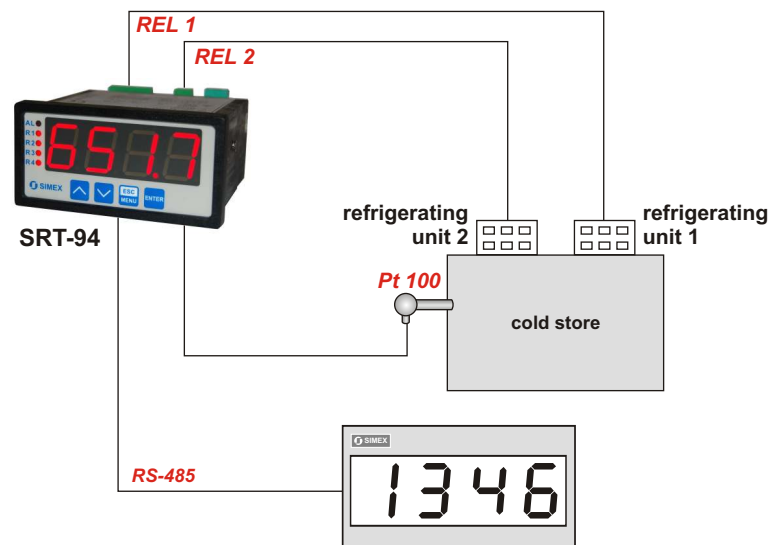

Exemplary pin assignment

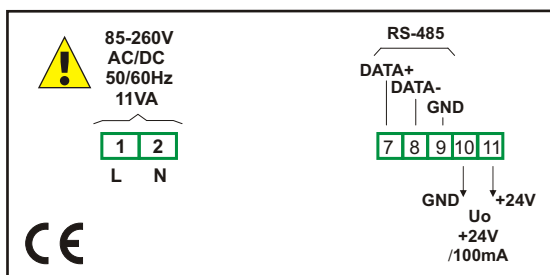

Technical data

Power supply: 19V + 50V DC; 16V + 35V AC or 85 + 260V AC/DC, all separated
Power consumption: for 85 + 260V AC/DC and 16V + 35V AC power supply: max. 11 VA; for 19V + 50V DC power supply: max. 8 W
Display: LED, red, 4 x 57 mm, with 9-step adjustment of colours and 8-step adjustment of brightness
Displayed values range: 4 digits (-999 + 9999 plus decimal point) or any of character indication in range of 7-segments display
Power supply output: 24V DC +5%, -10% / max.100 mA, stabilized
Communication interface: RS-485 (Modbus RTU - SLAVE)
Transmission speed: adjustable in range from 1200 to 115200 bit/sek.
Transmission parameters: 8N1 and 8N2
Operating temperature: 0°C + +50°C
Storage temperature: -10°C + +70°C
Protection class: IP 65 (standard); IP 67 (option)
Case: wall-mounted
Case material: ABS + glass fibre
Case dimensions: IP 65 type case: 215 x 185 x 118,2 mm
 IP 67 type case: 230 x 140 x 96,5 mm

Ordering

SWS-457-0000-1-X-XX1

options:
 01 : IP 65 (standard)
 09 : IP 67

power supply:
 3 : 24V AC/DC
 4 : 85V - 260V AC/DC

Accessories



IR remote controller
SIR-15