

品名：簡訊發報機

型號：AplusWEB

www.smartmeter.com.tw  
www.umarket.com.tw




特色：可通過網路瀏覽器設定，3個LED指示燈

- 易用性，靈活的用戶配置
- 重複短信，自動健康檢查
- 獨立運行，基於微控制器的設計
- 遠程手機管理，可擴充模組
- 低功耗，小而堅固
- 遠程監測，控制密碼設定功能

規格：

應用專案：

工作電壓: 9-18 VDC
通訊頻率: 四頻 GSM 850/900/1800/1900 兆赫
數位輸入(DI): 8
繼電器輸出(Relay): 2
模擬輸入 (4-20mA) : 2
接口: HTML 接口，可通過網路瀏覽器設定
顯示: 3 個 LED 指示燈
短訊提示: 6 個手機號碼
電子郵件警報: 無
事件記錄: 無

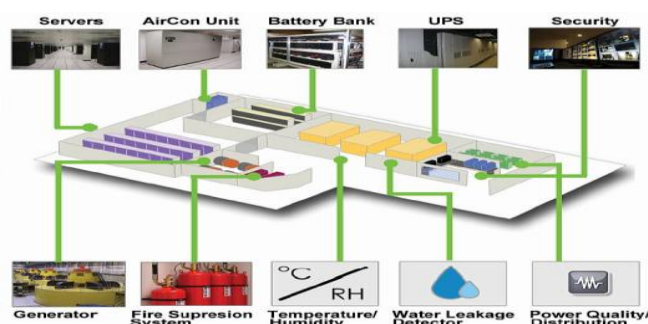

產品概述：

Continuous monitoring of the alert signals and send SMS message alert upon detection of any alert triggered

Inform instantly by SMS message on your mobile phone anytime, anywhere

AplusWEB Model AM-502										
Module ID	AP Address	AP Address	Cell Network	Signal Strength	Unavailable %	Legs	Drain & Time	Admin User	Access Time	
000001	4500	192.168.1.30 (Static)	GSM	-85	0%	0	23:46:30	admin	23:46:30	
Input	Description	Status								
I1	Input X1	0000								
I2	Input X2	0000								
I3	Input X3	0000								
I4	Input X4	0000								
I5	Input X5	0000								
I6	Input X6	0000								
I7	Input X7	0000								
I8	Input X8	0000								
Output Relay	Description	Status	Control							
O1	Output Y1	OFF	0							
O2	Output Y2	OFF	0							
Reading	Description	Status	Value							
R1	Reading A1	High (Alarm)	88.7							
R2	Reading A2	High (Alarm)	92.2							
Battery	Battery	Low	1.1 Volt							

選購配件：

**Intelligent DC Supply** DPC1204E

Model : DPC-1204E  
Input : 230VAC  
Output : 12V, 3A max, 1A continuous  
Battery : 12V, 4Ah Sealed Lead Acid (External)  
Dimension : 160(d) x 150(w) x 65(h) mm  
Weight : 1.8kg (battery) . 790g (charger)  
Features : Smart charger with over-charging & over discharging protection  
: Relay output signal for power failure Alarm  
: LED indicators for AC and DC power supply

**External Antenna** ANT3DB

Model : Ant3db3M  
Type : 3db gain 900/1800Mhz Antenna  
Mount : Magnetic base mounting  
Length : 32 cm  
Features : Boost up antenna signal in enclosed area

**Temperature Sensor** TS-70

Power : DC 12V  
Interface : 2 wire loop powered, non polarized  
Output : 4 - 20mA  
Dimension : 75(l) x 55(w) x 25(h) mm  
Accuracy : +/- 0.5 °C  
Range : Range 0-70 °C  
Features : IC sensor provides linear and accurate measurement

**Temperature & Humidity Sensor** THS-90R

Power : DC 12V  
Interface : 4 wire (2 Power, 1 Temp, 1 Humidity)  
Output : 4 - 20mA  
Dimension : 112(l) x 88(w) x 42(h) mm  
Accuracy : +/- 0.3 °C, +/- 2% RH  
Range : 0-50 °C, 0-100%RH  
Features : IC sensor provides linear and accurate measurement

**Water Detection Sensor** SP-10

Power : 12-24V AC/DC  
Output : Open collector drive  
Type : Spot Water Detection Sensor  
Dimension : 24(h), 44(diameter) mm  
Features : Detects water on flat surface  
: Fully sealed water proof casing  
: Adjustable sensing height  
: Visual alarm indication