

SRP-77

- process meter with 2 displays
- input 0/4-20 mA, 0/1-5V, 0/2-10V
- 0, 1 or 2 relay outputs (or OC type)
- power supply output: 24V DC
- RS-485 / Modbus RTU




The main advantages of regulator SRP-77 are two rows of display. The first one presents measuring value, second one - programmed values: max. and min. 1 or 2 relay (or OC) outputs make it possible to control processes ON/OFF type. Current input has protection safeguarding of the measuring resistor against damage. The device is dedicated to applications, where there is necessity of continuous control of the threshold values. The RS-485 enables data transmission in production process monitoring systems.


- programmable measuring range,
- programmable hystereses and delays of control outputs,
- password protected,
- programmable indication filtration,
- overload-protected current input,
- versions available with AC and DC power supply.

Typical applications

1. Measuring of pressure in a chamber with operating of the compressor according to set parameters and operating of relief valve, easy control of a threshold value.

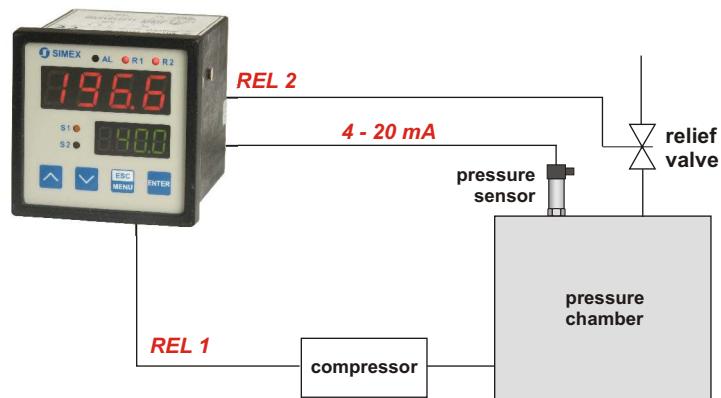

Exemplary pin assignment

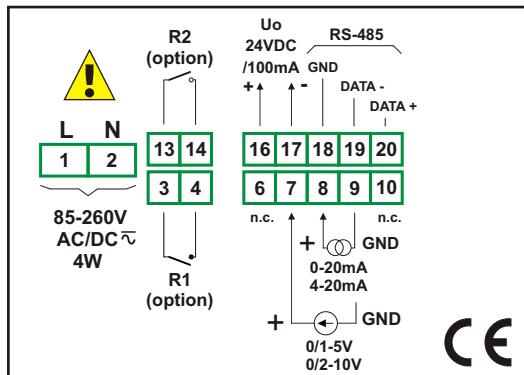

Technical data

Power supply: 19V ÷ 50V DC; 16V ÷ 35V AC or 85 ÷ 260VAC/DC, all separated
Power consumption: for 85 ÷ 260V AC/DC and 16V ÷ 35V AC power supply: max. 4,5 VA; 19V ÷ 50V DC power supply: max. 4,5 W
Display: LED, double 4 x 13 mm (red) and 4 x 10 mm (green)
Input: current 0-20 mA or 4-20 mA, programmable, input resistance < 65 Ω (typ. 55 Ω), overload-protected, input current limited to 40 mA;
 voltage 0-5 V, 1-5V, 0-10V or 2-10V, programmable, input resistance > 50 kΩ
Displayed values range: -999 - 9999 + decimal point
Accuracy: 0.1% @25°C
Stability: 50 ppm/°C
Outputs: 0, 1 or 2 relays 1A/250V AC (cosφ=1) or the OC 30mA/30VDC/100mW
Transducer power supply output: 24V DC ±5%, -10% / max. 100 mA, stabilized, not insulated from measuring inputs
Communication interface: RS-485, 8N1 and 8N2, 1200 bit/s ÷ 115200 bit/s, Modbus RTU (not galvanically insulated from measuring inputs)
Operating temperature: 0°C ÷ +50°C
Storage temperature: -10°C ÷ +70°C
Protection class: IP 65 (front), available additional frame IP 65 for panel cut-out sealing; IP 20 (case and connection clips)
Case: board
Case material: NORYL - GFN2S E1
Case dimensions: 72 x 72 x 100 mm
Panel cut-out dimensions: 66,5 x 66,5 mm
Installation depth: min. 102 mm
Board thickness: max. 5 mm

Ordering

SRP-77-18XX-1-X-XX1

options:

- 00 : no options
01 : IP 65 frame

power supply:

- 3 : 24V AC/DC
4 : 85V - 260V AC/DC

type of outputs:

- 0 : no output
1 : REL
2 : OC

number of outputs:

- 0
1
2