

品名：專業型簡訊發報機

型號：MessageMaster4000



特色：可通過網路瀏覽器設定，液晶顯示幕，背光顯示，並透過 E-mail 方式通知異常警報

■ 易用性，直觀的用戶界面

■ 微控制器的設計，可程式運算.低功耗

■ 靈活的的架構，遠端存取

■ 小型而堅固，重複短信,排程通報


■ 獨立操作，可擴充模組

■ 自動健康檢查，遠程手機管理

規格：

工作電壓: 9-30 VDC
通訊頻率: 四頻 GSM 850/900/1800/1900 兆赫
數位輸入(DI): 8
繼電器輸出(Relay): 4
模擬輸入 (4-20mA) : 4
通訊: HTML 語法, 可經由網路瀏覽器設定
顯示: 16x2 數位液晶顯示幕.即時數據.背光顯示
短訊提示: 40 組手機號碼
電子郵件警報:有
事件記錄: 500 筆



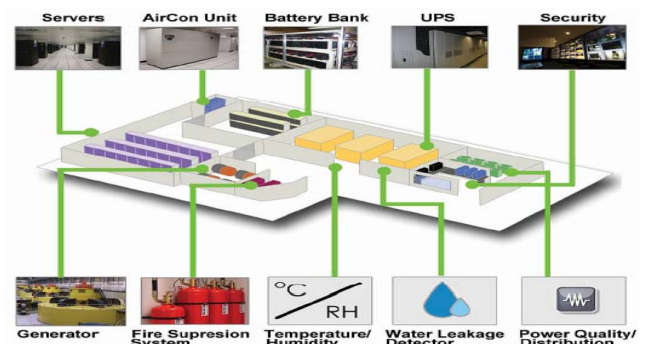


應用專案：



產品概述：



選購配件：

<p>Intelligent DC Supply / Charger</p> <p>DPC-1204E</p>  <p>Power : 230VAC Output : 12V, 3A max, 1A continuous Battery : 12V, 4AH Sealed Lead Acid (External) Dimension : 160(l) x 150(w) x 65(h) mm Weight : 1.8 kg (battery) , 790 g (charger) Features : : Smart charger with over-charging & over discharging protection : Relay output signal for power failure Alarm : LED indicators for AC and DC power supply</p>	<p>External Antenna</p> <p>Ani3M</p>  <p>Frequency : 3db gain 900/1800MHz Antenna Mount : Magnetic base mounting Cable : 3m RG179 coaxial cable Features : Boost up GSM signal in enclosed area Bandwidth : 90/280 MHz Max input Power : 60 W Input Impedence : 50 Ω</p>	
<p>Temperature Sensor</p> <p>TS-70</p>  <p>Power : DC 12V Interface : 2 wire loop powered, non polarized Output : 4 - 20mA Dimension : 75(l) x 55(w) x 25(h) mm Accuracy : +/- 0.5 °C Range : Range 0-70 °C Features : IC sensor provides linear and accurate measurement</p>	<p>Temperature & Humidity Sensor</p> <p>THS-90R</p>  <p>Power : DC 12V Interface : 4 wire (2 Power, 1 Temp, 1 Humidity) Output : 4 - 20mA Dimension : 112(l) x 88(w) x 42(h) mm Accuracy : +/- 0.5 °C, +/- 5% RH Range : Range 0-50 °C, 0-100 % RH Features : IC sensor provides linear and accurate measurement</p>	<p>Water Detection Sensor</p> <p>SP-10</p>  <p>Power : 12-24V AC/DC Output : Open collector drive Type : Spot Water Detection Sensor Dimension : 24(h), 44(diameter) mm Features : Detects water on flat surface : Fully sealed water proof casing : Adjustable sensing height : Visual alarm indication</p>