

CENTER 317

HUMIDITY TEMPERATURE METER

(DEW POINT & WET BULB)



Feature:

- Dew Point and Wet Bulb temperature Measurement.
- Fast response.
- Auto shut off for Battery Saving.
- MAX/MIN Function.
- Dual displays:
Primary display for Humidity;
Secondary displays for temperature.

CENTER®

CENTER 317 HUMIDITY TEMPERATURE METER

SPECIFICATIONS

Measurement Range:

Temperature: -20°C~60°C; -4°F~140°F

Humidity: 0%RH~100%RH

Resolution: 0.1°C/0.1°F/0.1%RH

Accuracy:

Temperature: $\pm 0.8^{\circ}\text{C}$, 1.6°F

Humidity: $\pm 2.5\% \text{RH}$

Sampling Rate: 2 times/sec

Humidity Sensor:

Electronic capacitance polymer film sensor.

Battery Type: 1.5V AA size battery x 4

Operating Condition: 0°C to 40°C (<80%RH)

Dimensions: 210×65×43mm

Accessories: Batteries, Instruction Manual

CE



LED Back Light

1:1 Size



33%RH / 75%RH
Humidity Standard (OPTIONAL)


* The specifications and other information in this catalogue are subject to change without prior notice.

Distributed by:

Dual Display



Primary display
for Humidity;
Secondary displays
for temperature.

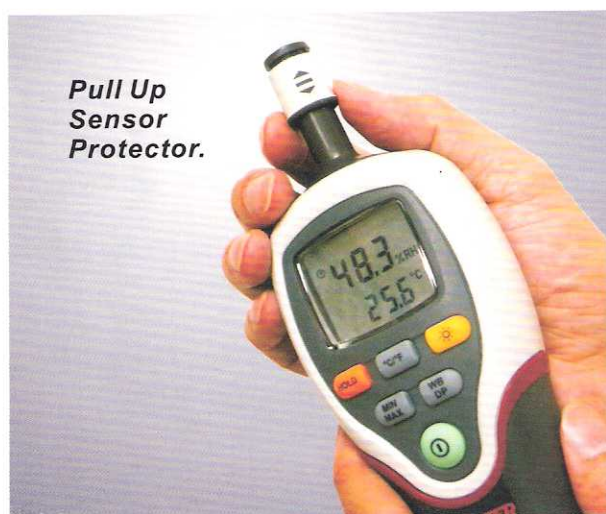

Pull Up
Sensor
Protector.



達因國際實業有限公司

Control & Monitor

電話 : + 8 8 6 - 2 - 2 8 2 8 3 2 4 1
傳真 : + 8 8 6 - 2 - 2 8 2 0 0 5 0 2
網址 : www.umarket.com.tw
電郵 : service@umarket.com.tw